



WELDED BAR GRATING


Type 19-4 (Standard") **Cross Bars 4 ins. c. to c.**
Bearing Bars 1-3/16 ins. c. to c.

Sizes Available	Bearing Bars	Weight
	in.	lbs./sq. ft.
	3/4 x 1/8	3.99
	3/4 x 3/16	5.87
	1 x 1/8	5.15
	1 x 3/16	7.35
	1-1/4 x 1/8	6.20
	1-1/4 x 3/16	9.03
	1-1/2 x 1/8	7.35
	1-1/2 x 3/16	10.95
	1-3/4 x 3/16	12.62
	2 x 3/16	14.30
	2-1/4 x 3/16	15.87
	2-1/2 x 3/16	17.55

Finish factory dip black or red.

*Type 19-4 is our standard recommended for most normal usage. However, types with different spacings are available as specified: 19-2, 15-4, and 15-2. (The figure represents the spacing of the bearing bars in sixteenth of an inch: the second figure the spacing of cross bars in inches).

WELDED STAIR TREADS

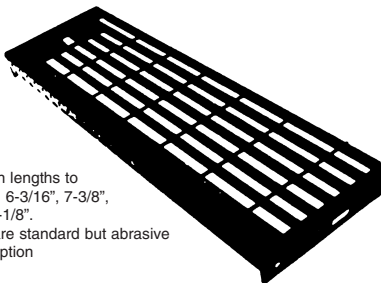

Stair treads are available in lengths to suit in the following widths: 6-3/16", 7-3/8", 8-9/16", 10-15/16", and 12-1/8".

Checkered plate nosings are standard but abrasive nosing is available as an option
 Finish: factory dip red.

**BAR GRATING AND TREADS AVAILABLE IN
 BOTH PLAIN AND SERRATED**